



1. Drum comes with holes pre-drilled in the lid



2. Screw gauge assembly onto motor




3. Feed suction line (attached to PVC) through pre-drilled hole and attached to barbed 90



4. Feed float cord through pre-drilled hole on lid and attach PVC using supplied nut



5. Align motor with predrilled holes and use 1/4 in bolts to secure to lid

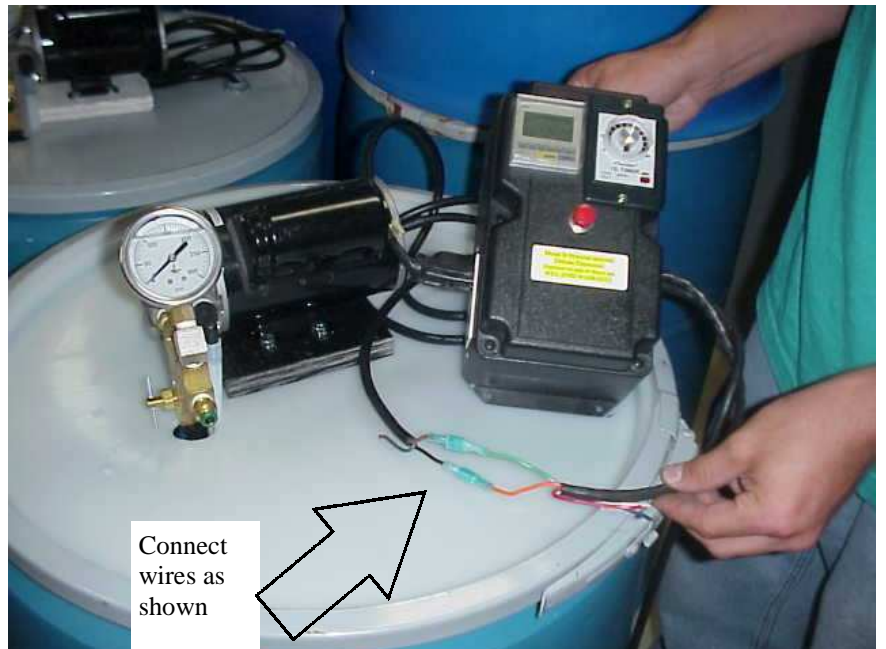

Connect wires as shown