



## TRANAX 1700W

### TRANAX 1700W

The new Tranax 1700w retail ATM, represents best in class performance and uncompromising value in a confidence inspiring design. The 1700w integrates a host of high-end features a 17.78 cm high resolution colour LCD supporting custom screen advertisements and communicates via 56K modem or integrated ethernet (SSL).

Built and engineered from the experience of over 80,000 existing Tranax ATMs, the 1700w is built on a platform that is flexible, modular, and robust.

The Tranax 1700w is TDES and ADA compliant out of the box, including a PCI/ VISA/Interac certified encrypting PIN pad (EPP), a voice guidance system and lighted action indicators.



### FEATURES

**HIGH BRIGHTNESS TOPPER**  
Optional high-brightness topper

**INTEGRATED ILLUMINATED TOPPER**  
Integrated illuminated topper for creating high visibility and attracting customers.

**MONITOR**  
17.78 cm diagonal 32-bit colour, back lit TFT LCD panel 800x600 SVGA resolution.

**PRINTER**

- 56 mm thermal receipt printer
- 200 DPI monochrome print capable

**KEYPAD**

- 16-key alphanumeric keypad
- VISA/Interac PCI certified
- Triple DES (TDES) compliant
- Encrypting PIN pad (EPP)

**CASH DISPENSER**


- Sliding cash dispensing unit for easy



### MANDRAKE.ATM

Call Business Development Director on 0425 376 184, [sales@mandrakeatm.com](mailto:sales@mandrakeatm.com), Toll Free 1800 MR ATMS (1800 672 867), PO Box 545 Darlinghurst NSW 1300, [www.mandrakeatm.com](http://www.mandrakeatm.com). ABN 72 111 571 076.

Tranax 1700W -  
Raising the bar for retail ATMs.

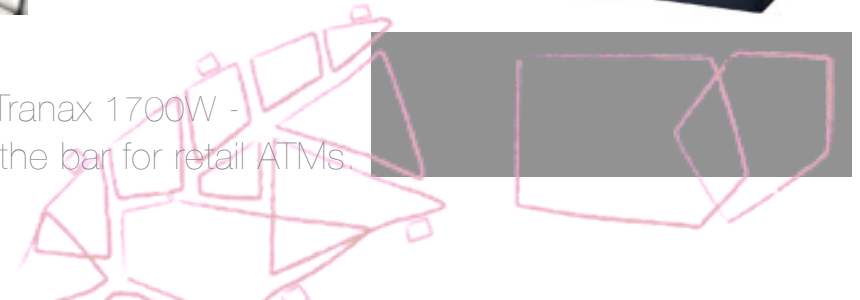

**ADVANCED SERVICES**

The Tranax 1700w can display 8 custom graphic screens. These can be loaded directly at the ATM using a SD memory card, or uploaded remotely using the TranRMS monitoring software.

**DIMENSIONS**

- 142.42 cm high
- 37.78 cm wide
- 59.42 cm deep

**WEIGHT**

93.44 kg

**OPERATING ENVIRONMENT**

Temperature range: 5 C- 35 C. Relative humidity: non-condensing 15%-85%.



- 1700 note removable cassette (1710w)
- CPU
  - Intel Xscale 32-bit CPU Windows CE operating system
- CARD READER
  - Manual insert (dip) magnetic card reader EMV (optional)
- ADA
  - Accessible keypad layout
  - Voice guidance
  - Lighted action indicators
- SECURITY
  - UL 291 Business Hour listed
  - Electronic lock
  - Cencon Lock (optional)
- COMMUNICATION
  - 56k dial-up modem or ethernet (TCP/IP)
  - On-board SSL encryption

